





### Execution

Prefabricated (tunnel) box sections or viaducts made from concrete and/or steel are transported in a relatively short time (e.g. overnight or during a weekend) from their prefabrication location to their final destination using specialised jacking methods.

### Applications

A fast, efficient method for placing box sections or viaducts under existing structures, such as railway lines, roads or motorways. This may involve jacking up and subsequently jacking or pressing small or large (usually rectangular) structures into place. One of the factors that encourages the use of this method is minimal impact for traffic.

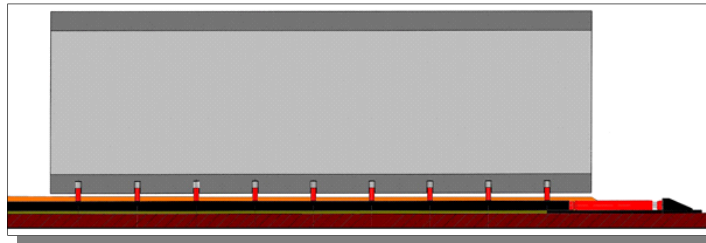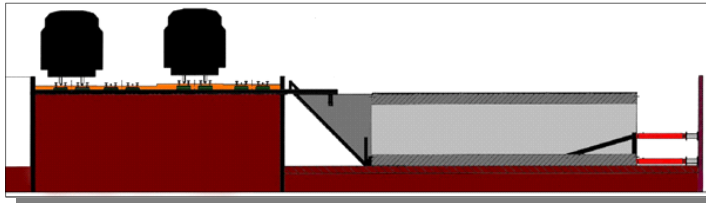

### Advantages

Short intervention times and minimal impact for traffic and surrounding residents. Rail traffic does not necessarily need to be interrupted.

